

Modulabstände Kantenausleuchtung ELLIP

optimale Distanz zwischen den Modulen, mm

Maße in mm

ELLIP 3-W
 2,8 Watt
 Höhe: 800 bis 1000mm



ELLIP N-W
 1,5 Watt
 300 bis 1000mm



ELLIP SN-W
 3,0 Watt
 1000 bis 2000mm




ELLIP 4,5
 4,5 Watt
 2000 bis 3000mm



Elementhöhe H Bautiefe BT	800-1000	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2000-3000
60	150																			
70	150																			
80		100	100	100	100	100	90	80												
100		120	120	140	140	140	130	120	100											
120		150	150	150	150	140	130	110	100	100										
140		150	150	150	150	130	120	110	100	90	90	80								
150		150	150	150	150	130	120	110	100	90	90	80	80							
170		150	150	150	140	130	120	110	100	90	80	80	70	70	70	60				
180		150	150	150	140	130	120	110	100	90	80	80	70	70	70	60	60			
200		150	150	150	130	120	110	100	90	90	80	80	70	70	70	60	60	60	60	120
250		150	150	140	130	110	100	100	90	80	80	70	70	70	60	60	60	60	60	120

Skizze zu den verwendeten Bezeichnungen und Anordnungen

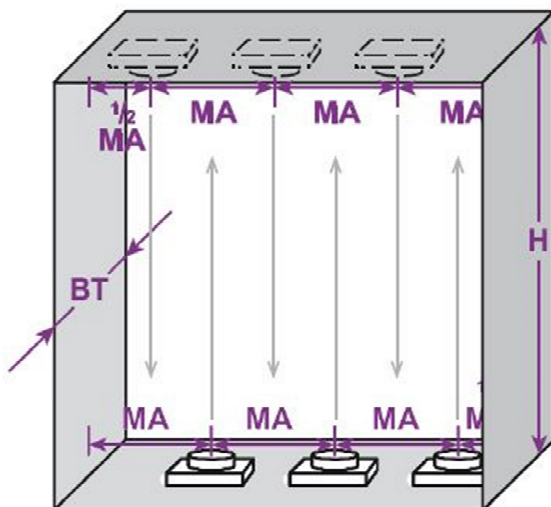

- BT Bautiefe in mm
- MA Modulabstand in mm
- H Innenhöhe Element
- $\frac{1}{2}MA$ halber Modulabstand am Rand
- Module oben und unten oder rechts und links um die Hälfte versetzt